


JSB 型垂直方向安装罩壳蛇形弹簧 联轴器（JB/T 8869-2000）

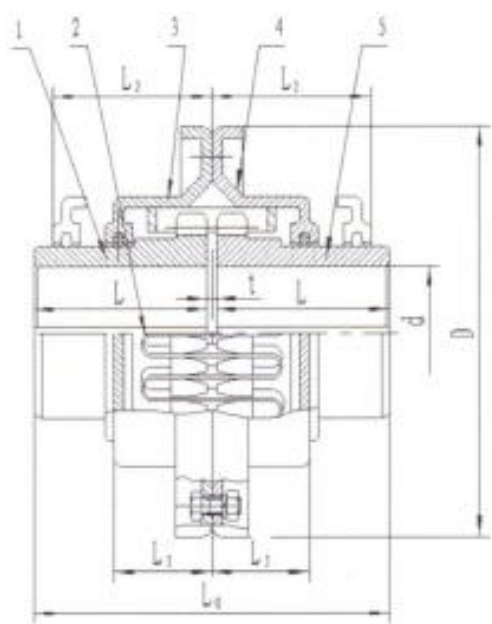

1、5—半联轴器；
2—润滑孔；
3—罩壳；
4—蛇形弹簧。

JSB 型垂直方向安装罩壳蛇形弹簧联轴器 基本参数和主要尺寸（JB/T 8869-2000）

型号	公称转矩 Tn N•m	许用转速 [n] rpm	轴孔直径 d	L	L0	L2	L3	D	间隙 t	质量 m（无 孔）kg	润滑油 kg
JSB1	45	5000	18, 19	47	97	48	24	112	3	1.95	0.0272
			20, 22, 24								
			25, 28								
JSB2	140		22, 24				25	122		2.59	0.048
			25, 28								
			30, 32, 35								
JSB3	224		25, 28	50	103	51	51	130		3.36	0.0544
			30, 32, 35, 38								
			40, 42								
JSB4	400		32, 35, 38	60	123	61	3I	149		5.44	0.068
			40, 42, 45, 48, 50								
JSB5	630		40, 42, 45, 48, 50, 55, 56	63	129	64	32	163		7.26	0.0862
JSB6	900	5500	48, 50, 55, 56	76	155	67	34	174	10.4	0.113	
			60, 63, 65								
JSB7	1800	4750	55, 56	89	181	89	44	200	17.7	0.172	
			60, 63, 65, 70, 71, 75								
			80								
JSB8	3150	4000	65, 70, 71, 75	96	199	96	147	233	25.4	0.254	
			80, 85, 90, 95								


JSB 型垂直方向安装罩壳蛇形弹簧联轴器

基本参数和主要尺寸 (JB/T 8869-2000)

型号	公称转矩 Tn N•m	许用转速 [n] rpm	轴孔直径 d	L	L0	L2	L3	D	间隙 t	质量 m (无孔) kg	润滑油 kg
JSB9	5600	3250	75	120	245	121	60	268	6	42.2	0.425
			80, 85, 90.95								
			100, 110								
JSB10	8000	3000	80, 85, 90, 95	127	259	124	63	287		54.4	0.508
			100, 110, 120								
JSB11	12500	2700	90, 95	149	304	143	74	320		81.6	0.735
			100, 110, 120, 125								
			130, 140								
JSB12	18000	2400	110, 120, 125	162	330	146	75	379		122	0.907
			130, 140, 150								
			160, 170								
JSB13	25000	2200	120, 125	184	374	156	78	411		180	1.13
			130, 140, 150								
			160, 170, 180								
			190, 200								
JSB14	35500	2000	140, 150	183	372	204	107	475		230	1.95
			160, 170, 180								
			190, 200								
JSB15	50000	1750	160, 170, 180	216	438	216	115	533		321	2.81
			190, 200, 220								
			240								
JSB16	63000	1600	180			226	120	584		448	3.40
			190, 200, 220								
			240, 250, 260								

◆注：1.若轴孔形式按 GB/T 3852 与制造厂协商。2.质量，转动惯量是无孔的计算值。

JSS 型蛇形弹簧联轴器 (JB/T 8869-2000)

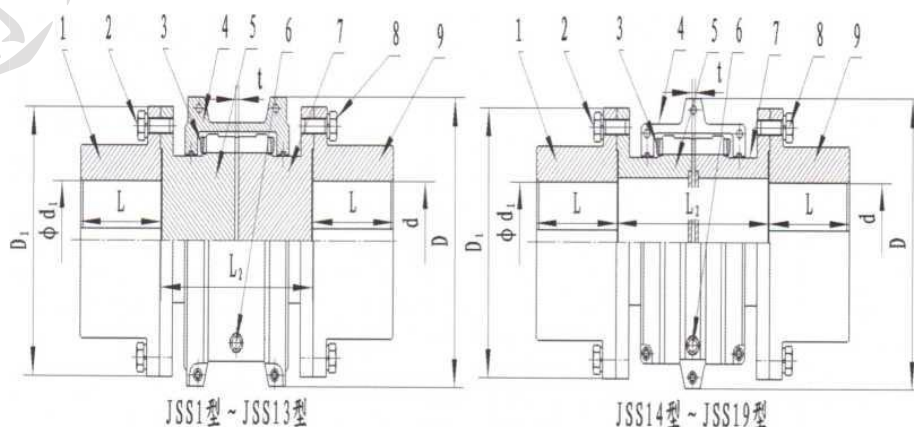

1、9-联接法兰 2、 8-螺栓 3-蛇型弹簧 4-罩壳 5、7-半联轴节 6-润滑孔