

WSP 型可伸缩小型十字轴 万向联轴器

◆ 结构特点:


■ 每节最大转动角度为 450

■ 连接更大的轴间距

■ 成品孔公差为 H7，另可根据要求开键槽，六角孔和四方孔

◆ 安装长度 L 和 X (行程) 的计算: 行程 $X \leq (L_{\max} \cdot 2 \cdot L_2 - B) / 2$ $L_{\min} \geq (L_{\max} + 2 \cdot L_2 + B) / 2$ 最小尺寸 $L_{\min} = L_2 + B + X + L_2$

◆ 标记示例

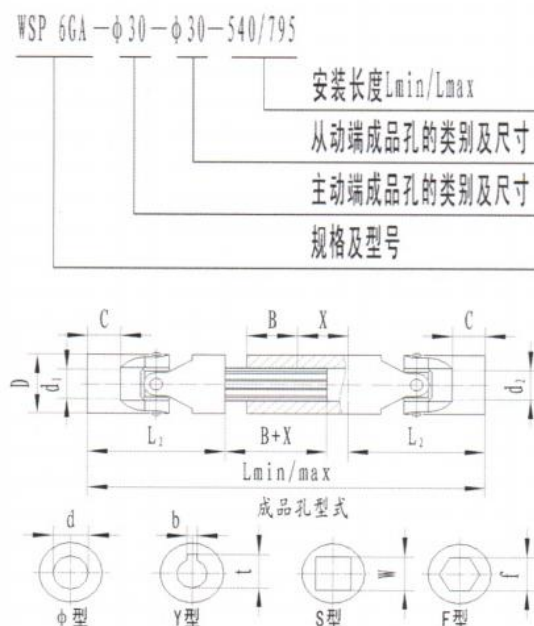

规格	尺寸 $L_{\min}/L_{\max}$ = 标准长度								
03	140	160	180	230					
	170	200	240	330					
04	160	180	200	220	250	280	300		
	190	225	270	300	355	420	450		
05	170	180	200	220	250	280	300	350	400
	200	220	260	300	350	420	450	550	650
1	190	210	240	250	275	300	380	400	
	220	250	320	350	390	430	490	630	
2	230	250	270	290	300	400	500		
	280	320	370	400	415	620	820		
3	250	270	290	320	380	420	500		
	300	340	380	440	560	640	800		
4	250	270	290	330	350	470			
	280	320	350	430	470	710			
5	295	310	350	380	420	460	500		
	345	375	450	500	590	660	745		
6	330	350	370	400	450	500	540		
	380	420	455	510	620	720	795		

型号及规格	d1, d2 (H7)	D	L2	C	$L_{\min}/\max$	B	b (js9)	t	W (H8)	f (H8)	花键槽
WSP-03GA	10	22	48	12	根据用户要求 决定 $L_{\min}/\max$	30	3	11.4	10	10	11×14-Z6
WSP-04GA	12	25	56	13		40	4	13.8	12	12	13×16-Z6
WSP-05GA	14	28	60	13		40	5	16.3	14	14	13×16-Z6
WSP-1GA	16	32	68	16		40	5	18.3	16	16	16×20-Z6
WSP-2GA	18	36	74	17		40	6	20.8	18	18	18×22-Z6
WSP-3GA	20	42	82	18	根据用户要求 决定 $L_{\min}/\max$	45	6	22.8	20	20	21×25-Z6
WSP-4GA	22	45	95	22		50	6	24.8	22	22	23×28-Z6
WSP-5GA	25	50	108	26		50	8	28.3	25	25	26×32-Z6
WSP-6GA	30	58	122	29		60	8	33.3	30	30	32×38-Z8
WSP-7GA	35	70	140	35		70	10	38.3	35	-	36×42-Z8
WSP-8GA	40	80	160	40		80	12	43.3	40	-	42×48-Z8
WSP-9GA	50	95	190	50		90	14	53.8	50	-	46×54-Z8

