


◇ G 型和 GD 型
Type G and GD



- 适用于各种通风机械的场合，最高转速可达 4000 min⁻¹
Suitable for every application in the range of general engineering up to a maximum speed of 4000 min⁻¹
- G 型为单节，GD 型为双节
Type G precision single joint Type GD precision double joint
- 每节最大转动角度为 30°
Maximum articulation angle 30 for each joint
- 成品孔公差为 H7,另可根据要求，开键槽，六角孔和方孔
Available with finish bore H7 - on request with keyway, hexagon bore or square bore
- G、GD 型(滑动轴承)免维护 n_{max}=1000 min⁻¹
Type G GD (plain bearing) Bearings designed n_{max}=1000 min⁻¹
- GZ、GDZ 型(滚针轴承)免维护 n_{max}=4000 min⁻¹
Type GZ、GDZ (needle bearing) Bearings designed n_{max}=4000 min⁻¹


单节 G

Precision single joint G

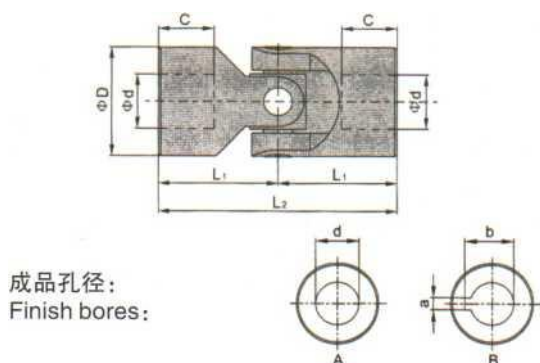

单节 GD

Precision double joint GD

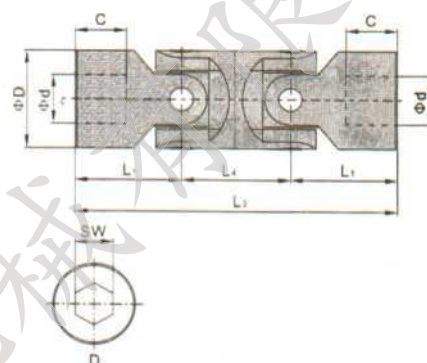

G、GD 型带滑动轴承 n_{max}=1000 min⁻¹

GZ、GDZ 型带滚针轴承 n_{max}=4000 min⁻¹

Type G、GD plain bearing n_{max}=1000 min⁻¹

Type GZ、GDZ needle bearing n_{max}=4000 min⁻¹

型号及规格 Types and size				d [H7]	D	L2	L1	c	L4	L3	a [JS9]	b	Q [H8]	sw [H8]	重量 Weight	
规格 Sine G	公称扭矩 N.m Nominal torsion G	规格 Sine GD	公称扭矩 N.m Nominal torsion GD												G [Kg]	GD [Kg]
3W	2.3	-	-	5	10	30	15	6	-	-	-	-	-	-	0.010	-
00 G	5.3	00 GD	4.1	6	12	31	15.5	8	19	50	-	-	-	-	0.015	0.03
01 G	12	01 GD	9.2	8	16	36	18	8	24	58	2	7.0	6	6	0.05	0.08
1 G	26	1 GD	24	10	20	42	21	10	26	68	3	11.4	10	10	0.10	0.16
02 G	45	02 GD	33	12	23	52	24	12	31	79	3	11.4	10	10	0.10	0.16
03 G	71	03 GD	49	14	25	56	28	13	35	91	4	13.8	12	12	0.16	0.27
04 G	95	04 GD	78	14	28	60	30	13	43	103	5	16.3	14	14	0.20	0.43
05 G	132	05 GD	98	16	32	68	34	16	48	116	5	18.3	16	16	0.30	0.53
06 G	175	06 GD	130	18	36	74	37	17	52	126	6	20.8	18	18	0.45	0.79
07 G	252	07 GD	189	20	42	82	41	18	60	140	6	22.8	20	20	0.60	1.13
08 G	332	08 GD	249	22	45	95	47.5	22	63	158	6	24.8	22	22	0.95	1.71
09 G	495	09 GD	363	25	50	108	54	26	71	179	8	28.3	25	25	1.20	2.24
10 G	795	10GD	595	30	58	122	61	29	86	208	8	33.3	30	30	1.85	3.27
11 G	1200	11 GD	900	35	70	140	70	35	95	235	10	38.3	-	-	3.15	5.44
12 G	1650	12GD	1386	40	80	160	80	40	108	268	12	43.3	-	-	4.60	8.09
13 G	1990	13GD	1563	50	95	190	95	50	123	313	14	53.8	-	-	7.60	13.27

◇订货描述示例:

Order form:

03 G	A (B、C、D) 内孔结构形式	Φ12/Φ12
规格与型号 Size/type of joint	A(B、C、D)bore Design Form	成品孔径 Finish bore (H7)