

产品结构特性与性能

Product structure characteristics and performance

PB 结构



- 1.最大转速: $\leq 1000\text{RPM}$
Max.speed: $\leq 1000\text{RPM}$
- 2.最大静扭矩: $\leq 5000\text{N.m}$
Static breaking torque: $\leq 5000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

PR结构



- 1.最大转速: $\leq 1300\text{RPM}$
Max.speed: $\leq 1300\text{RPM}$
- 2.最大静扭矩: $\leq 2000\text{N.m}$
Static breaking torque: $\leq 2000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

NB结构



- 1.最大转速: $\leq 2500\text{RPM}$
Max.speed: $\leq 2500\text{RPM}$
- 2.最大静扭矩: $\leq 2000\text{N.m}$
Static breaking torque: $\leq 2000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

CN结构




- 1.最大转速: $\leq 4000\text{RPM}$
Max.speed: $\leq 4000\text{RPM}$
- 2.最大静扭矩: $\leq 3000\text{N.m}$
Static breaking torque: $\leq 3000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

订货范例
Example



NB-GS16-8D-40

结构 Series
单节 Single
外径 Outer diameter
长度 Length
内孔形式 End hub Configuration
内孔 Inside diameter

GD

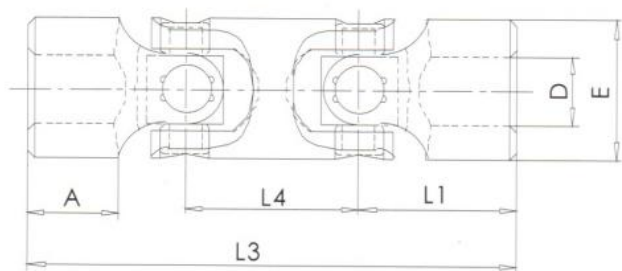

GS

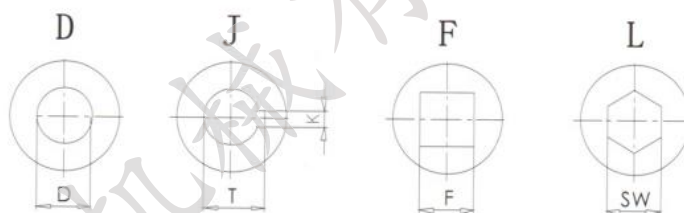

尺寸 型号规格		D (H7)	E	L2	L1	A	L4	L3	k (JS9)	T	F (H8)	SW (H8)
GS16	GD16	8	16	40	20	11	22	62	2	9	8	8
GS20	GD20	10	20	45	22.5	11	24	72	3	11.4	10	10
GS22	GD22	10	22	48	24	13	26	74	3	11.4	10	10
GS25	GD25	12	25	56	28	15	30	86	4	13.8	12	12
GS28	GD28	14	28	60	30	15	36	96	5	16.3	14	14
GS32	GD32	16	32	68	34	17	40	108	5	18.3	16	16
GS36	GD36	18	36	74	37	19	46	120	6	20.8	18	18
GS40	GD40	20	40	82	41	19	50	132	6	22.8	20	20
GS45	GD45	22	45	95	47.5	23	55	150	6	24.8	22	22
GS50	GD50	25	50	108	54	28	62	170	8	28.3	25	25