

## 快速锁紧精密万向节

### WITH QUICK LOCKING PRECISION JOINTS

◇ GR 型和 HR 型

Type GR and HR



•单节万向节带快速锁紧(可脱开)

Precision single joint with quick locking (separable)

•Gr 型带滑动轴承  $n_{max}=1000 \text{ min}^{-1}$

Type GR with plain bearing  $n_{max}=1000 \text{ min}^{-1}$

•HR 型带滚针轴承  $n_{max}=4000 \text{ min}^{-1}$



Type HR with needle bearing  $n_{max}=4000 \text{ min}^{-1}$

•每节最大转动角度为  $30^\circ$

Maximum articulation angle  $30^\circ$

•所供的快速锁紧装置(d2)仅有公差为 H7 的成品孔带 DIN6885/1-JS9 标准的键槽或六角孔可选

Quick locking (d2) only available with H7 bore and keyway to DIN 6885 sheet 1-JS9 or hexagon bore

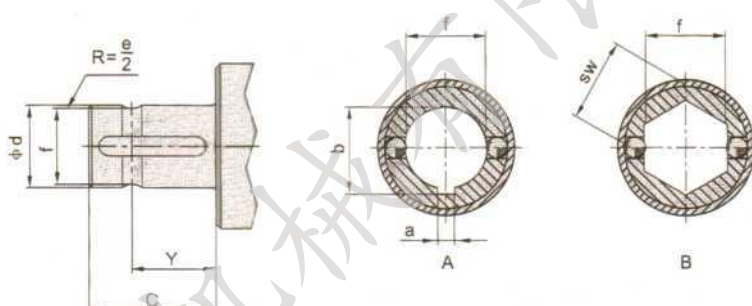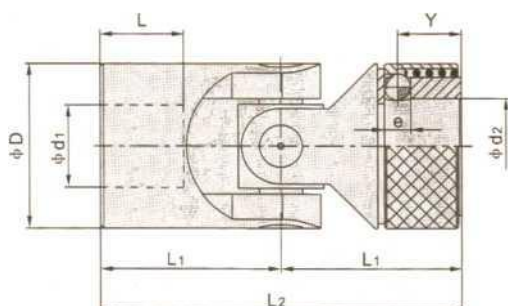

GR 型带滑动轴承  $n_{max}=1000 \text{ min}^{-1}$

HR 型带滚针轴承  $n_{max}=4000 \text{ min}^{-1}$

Type GR with plain bearing  $n_{max}=1000 \text{ min}^{-1}$

Type HR with needle bearing  $n_{max}=4000 \text{ min}^{-1}$

| 规格 Size |       | $d_1, d_2$ | D  | L2  | Li | c  | Y    | e    | f    | <sup>a</sup> | b    | SW [H8] |
|---------|-------|------------|----|-----|----|----|------|------|------|--------------|------|---------|
| GR      | HR    | [H7]       |    |     |    |    |      |      |      | [JS9]        |      |         |
| 01 GR   | -     | 8          | 16 | 52  | 26 | 14 | 9.5  | 3.5  | 7.0  | 2            | 9.0  | 8       |
| 02 GR   | 02 HR | 10         | 23 | 62  | 31 | 17 | 11.5 | 4.0  | 8.7  | 3            | 11.0 | 10      |
| 03 GR   | 03 HR | 12         | 25 | 74  | 37 | 21 | 13.5 | 4.0  | 11.0 | 4            | 13.3 | 12      |
| 04 GR   | 04 HR | 16         | 32 | 86  | 43 | 24 | 14.0 | 6.35 | 14.8 | 5            | 17.3 | 16      |
| 05 GR   | 05 HR | 18         | 36 | 96  | 48 | 28 | 19.0 | 8.0  | 16.0 | 6            | 19.8 | 18      |
| 06 GR   | 06 HR | 20         | 42 | 108 | 54 | 31 | 19.0 | 8.0  | 18.0 | 6            | 22.3 | 20      |
| 07 GR   | 07 HR | 22         | 45 | 120 | 60 | 34 | 20.5 | 10.0 | 20.0 | 6            | 24.8 | 22      |
| 08 GR   | 08 HR | 25         | 50 | 132 | 66 | 38 | 20.5 | 10.0 | 23.0 | 8            | 28.3 | 25      |
| 09 GR   | 09 HR | 30         | 58 | 166 | 83 | 49 | 25.0 | 10.0 | 28.0 | 8            | 33.3 | 30      |

◇订货描述示例:

Order form:

03 G  
规格与型号 Size/type of  
joint

A(B)内孔结构形式

A(B)bore Design Form

$\Phi 12/\Phi 12$

成品孔径 Finish bore (H7)