


Z7C 型胀套 Z7C type locking assemblies

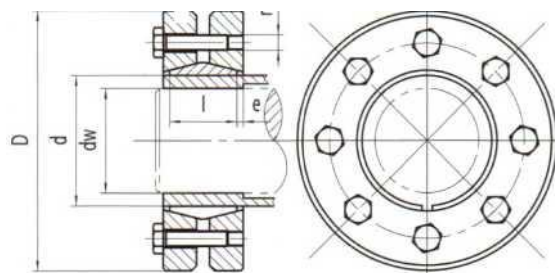

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies,type Z7C

规格 sizesd×D	基本尺寸 Basicdimensions						六角头螺栓 He×agonheadbolts			额定负荷 Ratedload		G(kg)
	d	D	I	H	dw	e	规格 disizes	数量 n QTY	MAN.m	MtKN.m	FtKN	
	mm											
140×230	140	230	60	74	95	7	M12	12	100	436	20.7	13
	140	230	60	74	100	7	M12	12	100	480	24.0	
	140	230	60	74	105	7	M12	12	100	518	27.2	
155×263	155	263	66	80	105	7	M12	15	100	545	28.6	20
	155	263	66	80	110	7	M12	15	100	591	32.5	
	155	263	66	80	115	7	M12	15	100	633	36.4	
165×290	165	290	72	88	115	8	M16	10	240	701	40.3	26
	165	290	72	88	120	8	M16	10	240	758	45.5	
	165	290	72	88	125	8	M16	10	240	811	50.7	
175×300	175	300	72	88	125	8	M16	10	240	832	52.0	29
	175	300	72	88	130	8	M16	10	240	880	57.2	
	175	300	72	88	135	8	M16	10	240	924	62.4	
185×330	185	330	92	112	135	10	M16	15	240	1037	70.0	47
	185	330	92	112	140	10	M16	15	240	1100	77.0	
	185	330	92	112	145	10	M16	15	240	1159	84.0	
200×350	200	350	92	112	145	10	M16	15	240	1291	93	50
	200	350	92	112	150	10	M16	15	240	1353	101.5	
	200	350	92	112	155	10	M16	15	240	1409	109.2	
220×370	220	370	114	134	160	10	M16	20	240	1625	130	65
	220	370	114	134	165	10	M16	20	240	1703	140.5	
	220	370	114	134	170	10	M16	20	240	1776	151	
240×405	240	405	120	144	170	12	M20	15	470	1835	156	87
	240	405	120	144	180	12	M20	15	470	1994	179.5	
	240	405	120	144	190	12	M20	15	470	2137	203	
260×430	260	430	136	160	190	12	M20	16	470	2242	213	100
	260	430	136	160	200	12	M20	16	470	2390	239	
	260	430	136	160	210	12	M20	16	470	2542	265	
280×460	280	460	148	172	210	12	M20	20	470	2686	282	132
	280	460	148	172	220	12	M20	20	470	2900	319	
	280	460	148	172	230	12	M20	20	470	3087	355	

规格 sizes ×D	基本尺寸 Basicdimensions						六角头螺栓 He×agonheadbolts			额定负荷 Ratedload		G(kg)
	d	D	l	H	dw	e	规格 disizes	数量 n QTY	MAN.m	Mt	FtKN	
	mm									KN.m		
300×485	300	485	152	176	230	12	M20	20	470	2965	341	140
	300	485	152	176	240	12	M20	20	470	3175	381	
	300	485	152	176	245	12	M20	20	470	3273	401	
320×520	320	520	160	184	240	12	M20	24	470	3317	398	165
	320	520	160	184	250	12	M20	24	470	3536	442	
	320	520	160	184	260	12	M20	24	470	3738	486	
340×570	340	570	176	200	250	12	M24	20	820	4080	510	240
	340	570	176	200	260	12	M24	20	820	4307	560	
	340	570	176	200	270	12	M24	20	820	4519	610	
360×590	360	590	180	204	280	12	M24	20	820	4707	659	250
	360	590	180	204	290	12	M24	20	820	4931	715	
	360	590	180	204	295	12	M24	20	820	5044	744	
390×660	390	660	188	212	300	12	M24	24	820	5733	860	350
	390	660	188	212	310	12	M24	24	820	5903	915	
	390	660	188	212	320	12	M24	24	820	6063	970	
420×690	420	690	214	238	330	12	M24	28	820	6182	1020	410
	420	690	214	238	340	12	M24	28	820	6470	1100	
	420	690	214	238	350	12	M24	28	820	6743	1180	
460×770	460	770	224	252	360	14	M27	24	1210	7222	1300	540
	460	770	224	252	370	14	M27	24	1210	7514	1390	
	460	770	224	252	380	14	M27	24	1210	7789	1480	
500×850	500	850	246	274	400	14	M27	30	1210	9400	1880	750
	500	850	246	274	410	14	M27	30	1210	9659	1980	
	500	850	246	274	420	14	M27	30	1210	9905	2080	
注：Z7C 型胀紧联结套螺钉的机械性能等级为 10.9 级。												