


Z9 型胀套 Z9 type locking assemblies

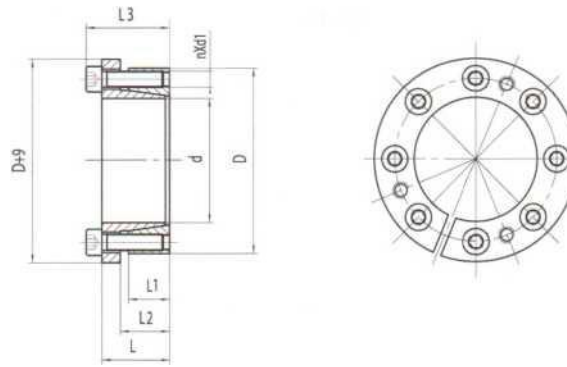

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies,type Z9

规格 sizesd×D	基本尺寸 Basicdimensions					内六角螺钉 Inhexagonscrews				额定负荷 Ratedload		Pf	Pf'	G(kg)
	d	D	I	L	e	B	规格 chsizes	数量 n	MA	FtKN	Mt	N/mm ²	N/mm ²	
			mm					QTY	N.m		KN.m			
100×145	100	145	54	75	5	65	M12	8	145	192	9.6	102	70	4.7
110×155	110	155	54	75	5	65	M12	8	145	191	10.5	93	66	5.1
120×165	120	165	54	75	5	65	M12	9	145	216	13	96	70	5.5
130×180	130	180	63	84	6	72	M12	12	145	287	17.8	100	78	7.5
140×190	140	190	63	84	6	72	M12	12	145	287	20.2	94	69	7.9
150×200	150	200	63	84	6	72	M12	12	145	287	21.6	88	66	8.4
160×210	160	210	63	84	6	72	M12	15	145	360	28.8	101	77	8.9
170×225	170	225	63	84	6	72	M12	16	145	383	32.6	101	76	10.5
180×235	180	235	63	84	6	72	M12	18	145	431	38.8	108	82	11.0
190×250	190	250	69	94	6	81	M14	15	230	493	46.8	106	80	14.3
200×260	200	260	69	94	6	81	M14	16	230	526	52.8	100	77	15.0
220×285	220	285	69	94	6	81	M16	14	355	640	70	119	92	17.8
240×305	240	305	86	112	7	98	M16	16	355	731	88	96	75	23.2
260×325	260	325	86	112	7	98	M16	18	355	822	107	103	82	24.8
280×355	280	355	94	120	8	106	M16	20	355	910	128	96	75	33
300×375	300	375	94	120	8	106	M16	22	355	1000	151	99	79	36
320×405	320	405	109	142	8	125	M20	18	690	1280	206	101	80	52
340×340	340	425	109	142	8	125	M20	20	690	1420	242	106	85	54
360×455	360	455	120	159	8	140	M22	20	930	1770	319	113	89	72
380×475	380	475	120	159	8	140	M22	20	930	1770	337	109	87	75
400×485	400	485	120	159	8	140	M22	20	930	1770	355	101	83	78
420×515	420	515	120	159	8	140	M22	22	930	1980	410	107	87	82

注：Z9 型胀紧联结套螺钉的机械性能等级为 12.9 级。