


Z11A/B 胀套 Z11A/B TYPE Locking assemblies

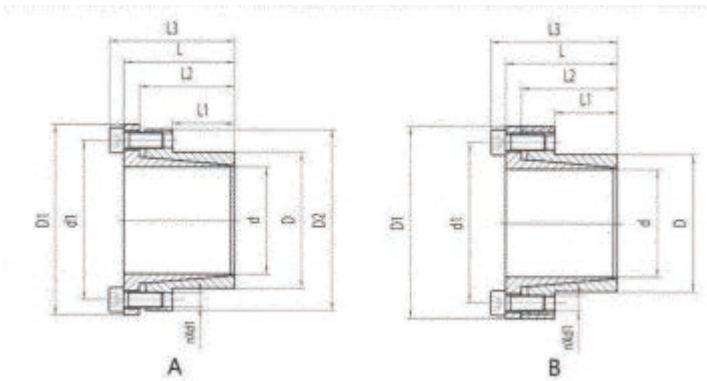

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies,type Z11A/B

规格	基本尺寸 Basic dimensions								内六角螺钉 Inhexagonal screws			额定负荷 Rated load				Pf		Pf		G
sizes	d	D	IL	L1	L2 L3 D1			D2	规格 di	数量 n	MA	Ft		h	/It	z/mrir	N/rmm,			(kg)
d×D	mm								sizes	QTY	N.m	KN		N.m						
			装配		形式							A	B	A	B	A	B	A	B	
6×14	6	14	21	10	18.5	24	25	23	M3	4	2	4	4.2	20	13	297	186	127	80	0.08
7×15	7	15	25	12	22	29	27	25	M4	3	5	7	7.3	20	29	297	186	127	80	0.08
8×15	8	15	25	12	22	29	27	25	M4	3	5	7	7.3	46	29	321	202	171	107	0.10
9×16	9	16	26	14	23	30	28	26	M4	4	5	10	7.3	50	32	243	153	138	87	0.12
10×16	10	16	26	14	23	30	28	26	M4	4	5	11.6	9.7	57	36	220	138	138	87	0.12
11×18	11	18	26	14	23	30	32	30	M4	4	5	11.6	9.7	85	53	267	167	163	102	0.14
12×18	12	18	26	14	23	30	32	30	M4	4	5	11.6	9.7	85	58	245	154	163	102	0.14
13×23	13	23	26	14	23	30	38	33	M4	4	5	15.5	9.7	93	63	210	140	128	80	0.15
14×23	14	23	26	14	23	30	38	33	M4	4	5	15.5	9.7	108	68	210	132	128	80	0.15
15×24	15	24	36	16	29	42	45	40	M6	4	17	35.5	22.4	285	179	307	193	219	138	0.26
16×24	16	24	36	16	29	42	45	40	M6	4	17	35.5	22.4	285	179	328	206	219	138	0.25
18×26	18	26	41	18	34	47	47	42	M6	4	17	35.5	22.4	320	200	290	184	202	127	0.27
19×27	19	27	41	18	34	47	49	43	M6	4	17	35.5	22.4	335	212	276	174	195	122	0.30
20×28	20	28	41	18	34	47	50	44	M6	4	17	35.5	22.4	350	224	262	165	187	118	0.30
22×32	22	32	48	25	41	54	54	48	M6	4	17	35.5	22.4	353	231	155	101	106	69	0.38
24×34	24	34	48	25	41	54	56	50	M6	6	17	53.4	33.6	636	400	237	149	167	105	0.40
25×34	25	34	48	25	41	54	56	50	M6	6	17	53.4	33.6	665	420	228	143	167	105	0.39
28×39	28	39	48	25	41	54	61	55	M6	6	17	53.4	33.6	745	470	204	128	146	92	0.47
30×41	30	41	48	25	41	54	62	57	M6	6	17	53.4	33.6	795	500	189	119	139	87	0.48
32×43	32	43	48	25	41	54	65	59	M6	8	17	71.3	44.8	1136	715	237	149	177	111	0.52
35×47	35	47	52	32	45	58	69	62	M6	8	17	71.3	44.8	1160	735	152	99	114	74	0.63
38×50	38	50	52	32	45	58	72	66	M6	8	17	71.3	44.8	1223	797	140	92	106	70	0.67
40×53	40	53	52	32	45	58	75	69	M6	8	17	71.3	44.8	1287	840	133	87	100	66	0.74
42×55	42	55	52	32	45	58	78	71	M6	8	17	71.3	44.8	1352	881	127	82	102	66	0.78
45×59	45	59	72	45	64	80	86	80	M8	8	41	119	77.6	2677	1745	155	102	119	78	1.23
48×62	48	62	72	45	64	80	87	81	M8	8	41	119	77.6	2855	1860	145	95	113	74	1.24
50×65	50	65	72	45	64	80	92	86	M8	8	41	119	77.6	2975	1940	140	92	108	70	1.40
55×71	55	71	82	55	74	90	98	92	M8	9	41	133	87.2	3680	2400	117	77	91	60	1.70
60×77	60	77	82	55	74	90	104	98	M8	9	41	133	87.2	4015	2620	107	70	84	55	1.90
65×84	65	84	82	55	74	90	111	105	M8	9	41	133	87.2	4350	2840	100	65	77	55	2.20
70×90	70	90	97	65	87	107	119	113	M10	9	83	212	139	7440	4850	123	81	96	63	3.05
75×95	75	95	97	65	87	107	126	119	M10	9	83	212	139	7970	5200	114	75	91	59	3.32
80×100	80	100	97	65	87	107	131	125	M10	12	83	283	184	1133	7390	144	94	15	75	3.50
														*						
85×106	85	106	97	65	87	107	137	131	M10	12	83	283	184	1204	7850	135	88	108	71	3.81
90×112	90	112	97	65	87	107	144	137	M10	12	83	283	184	1275	8320	128	83	102	67	4.20

注：Z11A/B 型胀紧联结套螺钉的机械性能等级为 12.9 级。