


Z12B 型胀套 Z12 Btype locking assemblies

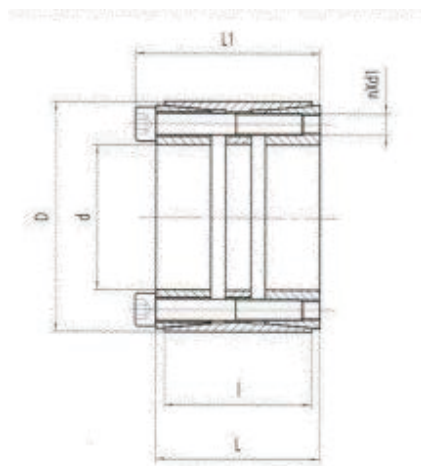

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies,type Z12B

规格 sizesd ×D	基本尺寸 Basicdimensions					内六角螺钉 Inhexagonscrews			额定负荷 Ratedload		Pf N/mm²	Pf N/mm²	G(kg)
	d	D	I	L	L1	规格出 sizes	数量 n QTY	MAN.m	FtKN	MtkNm			
70×110	70	110	50	60	70	M10	8	83	204	7.15	194	107	2.3
80×120	80	120	50	60	70	M10	10	83	250	10.25	212	123	2.5
90×130	90	130	50	60	70	M10	11	83	280	12.6	207	125	2.7
100×145	100	145	60	70	82	M12	10	145	372	18.6	205	126	4.1
110×155	110	155	60	70	82	M12	10	145	372	20.5	187	118	4.4
120×165	120	165	60	70	82	M12	11	145	408	24.5	188	122	4.8
130×180	130	180	65	79	91	M12	14	145	520	33.8	197	128	6.3
140×190	140	190	65	79	91	M12	15	145	557	39.0	196	130	6.6
150×200	150	200	65	79	91	M12	15	145	557	41.8	183	123	7.8
160×210	160	210	65	79	91	M12	16	145	593	47.5	183	125	9.4
170×225	170	225	78	92	106	M14	15	230	764	65.5	193	133	10.7
180×235	180	235	78	92	106	M14	15	230	765	69.0	182	127	11.3
190×250	190	250	88	102	116	M14	16	230	815	77.5	163	103	14.6
200×260	200	260	88	102	116	M14	20	230	1020	102	194	124	15.3
220×285	220	285	96	108	124	M16	15	355	1060	117	174	113	20.2
240×305	240	305	96	108	124	M16	20	355	1410	170	212	140	21.8
260×325	260	325	96	108	124	M16	21	355	1480	193	205	138	23.4
280×335	280	355	96	110	130	M20	15	690	1650	232	213	141	30.0
300×375	300	375	96	110	130	M20	15	690	1650	249	198	134	31.2
320×405	320	405	124	136	156	M20	20	690	2210	354	191	125	48.0
340×425	340	425	124	136	156	M20	20	690	2210	376	180	119	51.0
360×455	360	455	140	155	177	M22	20	930	2750	496	185	118	69.0
380×475	380	475	140	155	177	M22	20	930	2750	524	175	113	73.0
400×495	400	495	140	155	177	M22	22	930	3010	602	183	122	76.0
420×515	420	515	140	155	177	M22	24	930	3300	694	190	127	80.0
440×535	440	535	140	155	177	M22	24	930	3300	728	166	123	81
460×555	460	555	140	155	177	M22	24	930	3300	760	159	118	85
480×575	480	575	140	155	177	M22	25	930	3440	830	159	119	88
500×595	500	595	140	155	177	M22	25	930	3440	861	153	115	91
520×615	520	615	140	155	177	M22	28	930	3850	1003	164	124	95
540×635	540	635	140	155	177	M22	28	930	3850	1042	158	120	98
560×655	560	655	140	155	177	M22	30	930	4130	1157	163	125	101
580×675	580	675	140	155	177	M22	30	930	4130	1199	158	121	104
600×695	600	695	140	155	177	M22	30	930	4130	1240	153	118	108

注: Z12B 型胀紧联结套螺钉的机械性能等级为 12.9 级。