


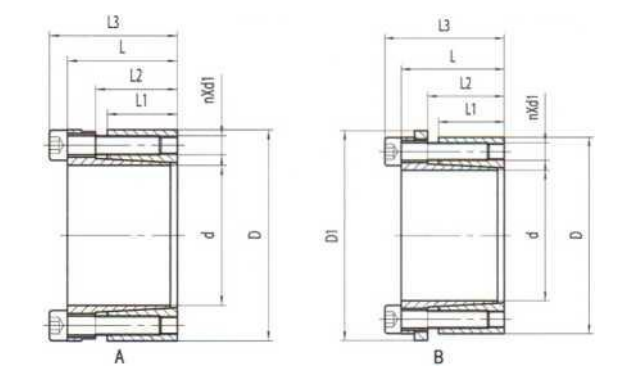

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies,type Z13A/B

规格 size	基本尺寸 Basic dimensions							内六角螺钉 In hexagonal screws			额定负荷 Rated load		Pf N/mm ²	G (kg)
	d	D	L	Li	L2	L3	Di	规格	数量 n					
	mm							disizes	QTY	MAN.m	FtKN	Mt KN.m		
19×47	19	47	39	26	30	45	53	M6	6	17	54	0.54	260	0.35
20×47	20	47	39	26	30	45	53	M6	6	17	54	0.60	250	0.36
22×47	22	47	39	26	30	45	53	M6	6	17	54	0.60	230	0.44
24×50	24	50	39	26	30	45	56	M6	6	17	54	0.65	210	0.47
25×50	25	50	39	26	30	45	56	M6	6	17	54	0.68	200	0.48
28×55	28	55	39	26	30	45	61	M6	6	17	54	0.78	180	0.55
30×55	30	55	39	26	30	45	61	M6	6	17	54	0.82	170	0.76
32×60	32	60	39	26	30	45	66	M6	9	17	82	1.31	235	0.79
35×60	35	60	39	26	30	45	66	M6	9	17	82	1.44	215	0.81
38×65	38	65	39	26	30	45	71	M6	9	17	82	1.52	200	0.87
40×65	40	65	39	26	30	45	71	M6	9	17	82	1.64	190	0.94
42×75	42	75	47	30	35	55	81	M8	6	41	101	2.13	215	1.02
45×75	45	75	47	30	35	55	81	M8	6	41	101	2.28	200	1.06
48×80	48	80	47	30	35	55	86	M8	6	41	101	2.43	190	1.70
50×80	50	80	47	30	35	55	86	M8	6	41	101	2.53	180	1.79
55×85	55	85	47	30	35	55	91	M8	9	41	152	4.18	245	1.89
60×90	60	90	47	30	35	55	96	M8	9	41	152	4.56	225	1.98
65×95	65	95	47	30	35	55	101	M8	9	41	152	4.96	210	2.15
70×110	70	110	67	40	46	77	116	M10	7	83	186	6.50	175	2.24
75×115	75	115	67	40	46	77	121	M10	7	83	186	7.00	165	3.07
80×120	80	120	67	40	46	77	126	M10	7	83	186	7.40	155	3.35
85×125	85	125	67	40	46	77	131	M10	8	83	213	9.00	170	3.59
90×130	90	130	67	40	46	77	136	M10	8	83	213	9.60	160	5.04
95×135	95	135	67	40	46	77	141	M10	10	83	267	12.6	185	5.38
100×1451	100	145	77	46	52	89	151	M12	7	145	270	13.3	160	5.81
10×155	110	155	77	46	52	89	161	M12	7	145	270	14.7	140	6.06
120×165	120	165	77	46	52	89	171	M12	8	145	309	18.4	150	7.61

注：1.Z13A/B 型胀紧联结套螺钉的机械性能等级为 12.9 级