


Z14A 型胀套 Z14A type locking assemblies

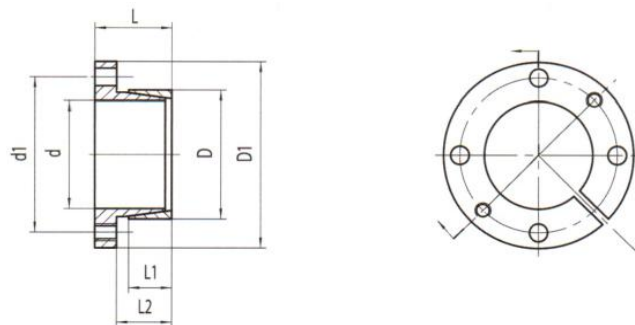

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies,type Z14A

规格 sizesd ×D	基本尺寸 Basicdimensions					内六角螺钉 Inhex agonscrews			额定负荷 Ratedload		Pf	Pf	G(kg)
	di	Di	L	Li	l2	规格 disizes	数量 n	MAN.m	Mt	Ft	N/mm²	N/mm²	
	mm						QTY		KN.m	KN			
14×25	33	42	26	16	20	M4	4	2.9	64	9	109	61	0.09
16×25	33	42	26	16	20	M4	4	2.9	73	9	96	61	0.08
18×25	33	42	26	16	20	M4	4	2.9	82	9	85	61	0.07
19×25	33	42	26	16	20	M4	4	2.9	87	9	81	61	0.07
20×30	39	50	26	16	20	M5	4	6	152	15	127	65	0.11
22×30	39	50	26	16	20	M5	4	6	167	15	116	65	0.11
24×30	39	50	26	16	20	M5	4	6	182	15	106	65	0.09
25×36	45	55	26	16	20	M5	4	6	190	15	102	57	0.15
28×36	45	55	26	16	20	M5	4	6	213	15	91	57	0.12
30×36	45	55	26	16	20	M5	4	6	228	15	85	57	0.11
32×42	51	62	28	16	20	M5	4	6	243	15	80	50	0.20
35×42	51	62	28	16	20	M5	4	6	266	15	73	50	0.17
36×42	51	62	28	16	20	M5	4	6	274	15	71	50	0.16
38×44	54	66	28	16	20	M6	4	10	400	21.2	93	65	0.18
40×48	58	70	28	16	20	M6	4	10	421	21.2	88	61	0.22
42×48	58	70	28	16	20	M6	4	10	442	21.2	84	61	0.19
45×55	67	82	35	20	25	M8	4	25	890	40	118	79	0.40
48×55	67	82	35	20	25	M8	4	25	949	40	110	79	0.35
50×62	74	89	35	20	25	M8	4	25	989	40	106	72	0.50
55×62	74	89	35	20	25	M8	4	25	1088	40	96	72	0.41
60×72	81	99	35	20	25	M8	4	25	1187	40	80	63	0.58
65×72	81	99	35	20	25	M8	4	25	1286	40	82	63	0.46

注：Z14A 胀紧联结套螺钉的机械性能等级为 8.8 级。