


Z15 型胀套 Z 15 type locking assemblies

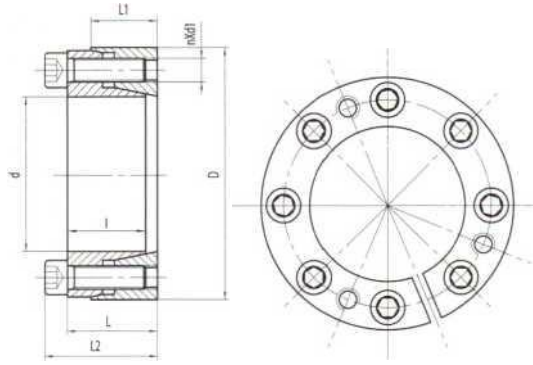

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies, type Z15

规格 size d×D	基本尺寸 Basic dimensions						内六角螺钉 In hexagonscrews			额定负荷 Rated load		Pt	Pf	G(kg)
	d	D	l	L	Li	l2	规格 disizes	数量 n QTY	Ma N.m	Mt KN.m	Ft kN	N/mm ²	N/mm ²	
	mm													
20×47	20	47	20	23	17	29	M6	5	17	0.34	34	242	121	0.25
22×47	22	47	20	23	17	29	M6	5	17	0.38	34	220	121	0.24
24×50	24	50	20	23	17	29	M6	5	17	0.41	34	202	114	0.27
25×50	25	50	20	23	17	29	M6	5	17	0.43	34	194	114	0.29
28×55	28	55	20	23	17	29	M6	6	17	0.60	42	207	124	0.31
30×55	30	55	20	23	17	29	M6	6	17	0.64	42	194	124	0.30
35×60	35	60	20	23	17	29	M6	7	17	0.90	51	194	133	0.33
40×65	40	65	20	23	17	29	M6	8	17	1.03	51	194	140	0.37
45×75	45	75	24	28	20	36	M8	6	41	1.8	80	200	144	0.62
50×80	50	80	24	28	20	36	M8	7	41	2.3	80	210	156	0.67
55×85	55	85	24	28	20	36	M8	8	41	2.9	107	218	169	0.72
60×90	60	90	24	28	20	36	M8	8	41	3.2	107	200	160	0.77
65×95	65	95	24	28	20	36	M8	9	41	3.8	120	208	171	0.82
70×110	70	110	29	34	24	44	M10	8	83	6.0	170	225	173	1.50
75×115	75	115	29	34	24	44	M10	8	83	6.4	170	210	166	1.59
80×120	80	120	29	34	24	44	M10	8	83	6.8	170	197	159	1.67
85×125	85	125	29	34	24	44	M10	9	83	8.1	190	209	171	1.76
90×130	90	130	29	34	24	44	M10	10	83	9.6	210	219	183	1.84
95×135	95	135	29	34	24	44	M10	10	83	10.1	210	207	176	1.90
100×145	100	145	33	38	28	50	M12	8	145	11	220	190	154	2.58
110×155	110	155	33	38	28	50	M12	9	145	14	250	194	162	2.79
120×165	120	165	33	38	28	50	M12	10	145	17	280	198	170	3.00
130×180	130	180	38	43	33	55	M12	12	145	23	350	190	158	4.10
140×190	140	190	38	43	33	55	M12	12	145	24	345	177	150	4.37
150×200	150	200	38	43	33	55	M12	14	145	30	400	192	166	4.63
160×210	160	210	38	43	33	55	M12	15	145	35	440	193	170	4.90
170×225	170	225	43	49	38	63	M14	12	230	41	480	176	151	6.56
180×235	180	235	43	49	38	63	M14	14	230	51	560	194	168	6.90
190×250	190	250	51	57	46	71	M14	16	230	61	640	177	150	9.27
200×260	200	260	51	57	46	71	M14	18	230	72	700	190	162	9.70
220×285	220	285	55	61	50	77	M16	16	355	99	900	198	168	12.3
240×305	240	305	55	61	50	77	M16	16	355	108	900	181	157	13.3
260×325	260	325	55	61	50	77	M16	18	355	130	1000	188	165	14.3
280×355	280	355	65	73	60	91	M18	18	485	170	1200	178	152	21.4
300×375	300	375	65	73	60	91	M18	20	485	200	1350	184	160	22.7
320×405	320	405	77	85	72	105	M20	20	690	275	1700	189	160	32.2
340×425	340	425	77	85	72	105	M20	20	690	290	1700	178	152	34.0
360×455	360	455	89	99	84	121	M22	20	930	385	2000	181	152	47.2
380×475	380	475	89	99	84	121	M22	21	930	430	2200	180	153	49.5
400×495	400	495	89	99	84	121	M22	21	930	450	2200	171	147	51.8
420×515	420	515	89	99	84	121	M22	24	930	545	2500	186	161	54.2
440×545	440	545	101	113	96	137	M24	24	1200	660	3000	181	154	72.0
460×565	460	565	101	113	96	137	M24	24	1200	690	3000	173	148	74.9
480×585	480	585	101	113	96	137	M24	24	1200	720	3000	166	143	77.9
500×605	500	605	101	113	96	137	M24	28	1200	880	3400	186	162	80.8
520×630	520	630	101	113	96	137	M24	28	1200	915	3400	179	155	88.1
540×650	540	650	101	113	96	137	M24	28	1200	950	3400	172	150	91.1
560×670	560	670	101	113	96	137	M24	30	1200	1060	3700	178	156	94.2
580×690	580	690	101	113	96	137	M24	30	1200	1100	3700	172	152	97.3
600×710	600	710	101	113	96	137	M24	30	1200	1130	3700	166	148	100.3

注：Z15 型胀紧联结套螺钉的机械性能等级为 12.9 级。