


Z22 胀套 Z22 type locking assemblies

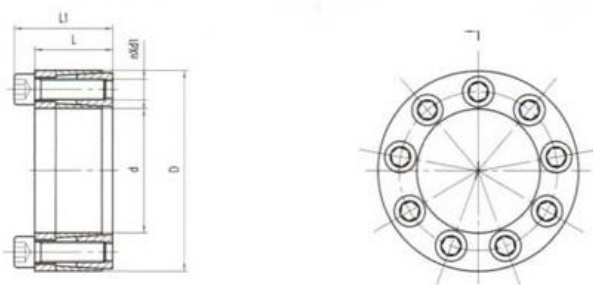

基本尺寸和参数 Basic dimensions and parameters of the locking assemblies,type Z22

规格 sizes dxD	基本尺寸 Basic dimensions				内六角螺钉 In hexagon screws			额定负荷 Rated load		Pf N/mm2	G (kg)
	d	D	L	L1	规格 di sizes	数量 n QTY	Ma N. m	Ft KN	Mt KN.m		
	mm										
18x40	18	40	18	24	M6	5	14	22	0.20	260	0.16
19x41	19	41	18	24	M6	5	14	22	0.21	255	0.18
20x42	20	42	18	24	M6	6	14	26	0.26	280	0.19
22x44	22	44	18	24	M6	6	14	26	0.29	260	0.19
24x46	24	46	18	24	M6	6	14	26	0.31	230	0.20
25x47	25	47	18	24	M6	6	14	35	0.33	270	0.20
28x50	28	50	18	24	M6	8	14	35	0.49	250	0.20
30x52	30	52	18	24	M6	8	14	35	0.52	230	0.24
32x54	32	54	18	24	M6	8	14	38	0.56	200	0.24
35x57	35	57	22	28	M6	9	14	38	0.68	190	0.25
36x59	36	59	22	28	M6	9	14	43	0.70	200	0.26
38x60	38	60	22	28	M6	10	14	43	0.83	190	0.27
40x62	40	62	22	28	M6	10	14	64	0.87	225	0.27
42x70	42	70	28	36	M8	8	35	64	1.36	210	0.38
45x73	45	73	28	36	M8	8	35	64	1.45	195	0.45
48x76	48	76	28	36	M8	8	35	64	1.55	190	0.46
50x78	50	78	28	36	M8	8	35	72	1.61	195	0.48
55x83	55	83	28	36	M8	9	35	72	2.00	190	0.49
56x84	56	84	28	36	M8	9	35	80	2.03	195	0.50
60x88	60	88	28	36	M8	10	35	80	2.42	190	0.55
63x91	63	91	28	36	M8	10	35	80	2.54	190	0.56
65x93	65	93	28	36	M8	10	35	114	2.62	180	0.58
70x105	70	105	35	45	M10	9	70	128	1.00	200	1.01
75x110	75	110	35	45	M10	10	70	128	4.80	205	1.06
80x115	80	115	35	45	M10	10	70	128	5.10	190	1.12
85x120	85	120	35	45	M10	10	70	128	5.45	180	1.19
90x125	90	125	35	45	M10	10	70	153	6.90	205	1.25

注：Z22 型胀紧联结套螺钉的机械性能等级为 12.9 级。