

产品结构特性与性能

Product structure characteristics and performance

PB 结构



- 1.最大转速: $\leq 1000\text{RPM}$
Max.speed: $\leq 1000\text{RPM}$
- 2.最大静扭矩: $\leq 5000\text{N.m}$
Static breaking torque: $\leq 5000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

- 1.最大转速: $\leq 1300\text{RPM}$
Max.speed: $\leq 1300\text{RPM}$
- 2.最大静扭矩: $\leq 2000\text{N.m}$
Static breaking torque: $\leq 2000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

PR结构



- 1.最大转速: $\leq 2500\text{RPM}$
Max.speed: $\leq 2500\text{RPM}$
- 2.最大静扭矩: $\leq 2000\text{N.m}$
Static breaking torque: $\leq 2000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

NB结构



- 1.最大转速: $\leq 4000\text{RPM}$
Max.speed: $\leq 4000\text{RPM}$
- 2.最大静扭矩: $\leq 3000\text{N.m}$
Static breaking torque: $\leq 3000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

CN结构





订货范例
Example

PB-HXS23-12D-52



HXS

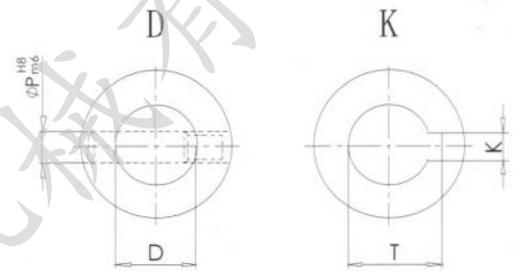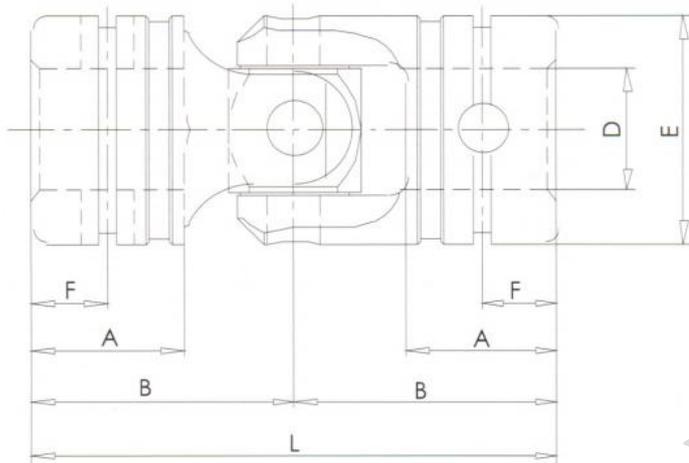

尺寸 型号规格	D (H8)	E	L	B	A	F	P (H8)	K (JS9)	T
HXS16	8	16	36	18	10	4.5	4	2	9
HXS20	10	20	42	21	12	5	4	3	11.4
HXS23	12	23	52	26	15	7	5	4	13.8
HXS26	14	26	62	31	18	8.5	6	5	16.3
HXS30	16	30	74	37	22	11	6	5	18.3
HXS36	18	35	87	43.5	26	13	8	6	20.8
HXS40	20	40	94	47	27	13.5	8	6	22.8
HXS45	22	45	104	52	29	14.5	10	8	25.3
HXS50	25	50	122	61	35	17.5	10	8	28.3