

产品结构特性与性能

Product structure characteristics and performance

PB 结构



- 1.最大转速: $\leq 1000\text{RPM}$
Max.speed: $\leq 1000\text{RPM}$
- 2.最大静扭矩: $\leq 5000\text{N.m}$
Static breaking torque: $\leq 5000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

PR结构



- 1.最大转速: $\leq 1300\text{RPM}$
Max.speed: $\leq 1300\text{RPM}$
- 2.最大静扭矩: $\leq 2000\text{N.m}$
Static breaking torque: $\leq 2000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

NB结构



- 1.最大转速: $\leq 2500\text{RPM}$
Max.speed: $\leq 2500\text{RPM}$
- 2.最大静扭矩: $\leq 2000\text{N.m}$
Static breaking torque: $\leq 2000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

CN结构





- 1.最大转速: $\leq 4000\text{RPM}$
Max.speed: $\leq 4000\text{RPM}$
- 2.最大静扭矩: $\leq 3000\text{N.m}$
Static breaking torque: $\leq 3000\text{N.m}$
- 3.最大工作角 45° 。
Max.working angle 45°

订货范例
Example

PB-XM22-12D-175+45

结构 Series
伸缩 Extension
外径 Outer diameter
伸缩长度 Length Extension
最短长度 length Minimum
内孔形式 End hub Configuration
内孔 Inside

XM

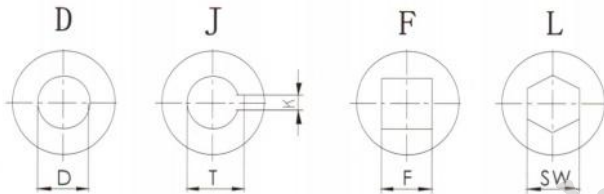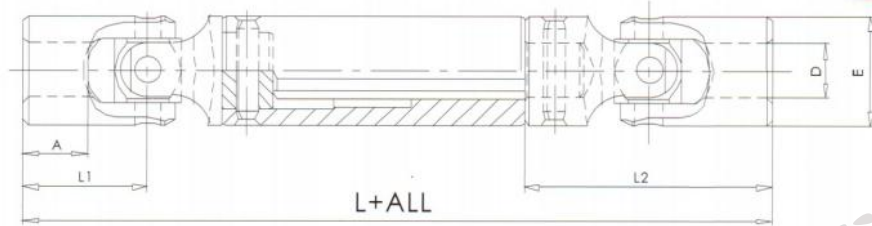

尺寸规格	D (H7)	E	L2	LI	A	L+ALL	L+ALL	L+ALL	SPLINE	K (JS9)	T	F (H8)	sw (H8)
XM20	10	20	45	22.5	11	160+45	180+60	195+75	6-14x11	3	11.4	10	10
XM22	10	22	48	24	13	175+45	190+60	205+75	6-14x11	3	11.4	10	10
XM25	12	25	56	28	15	220+50	250+100	300+150	6-16x13	4	13.8	12	12
XM28	14	28	60	30	15	240+50	265+100	330+150	6-20x16	5	16.3	14	14
XM32	16	32	68	34	17	255+50	280+100	350+150	6-20x16	5	18.3	16	16
XM36	18	36	74	37	19	285+70	310+100	370+150	6-22x18	6	20.8	18	18
XM40	20	40	82	41	19	320+70	350+100	370+150	6-25x21	6	22.8	20	20
XM45	22	45	95	47.5	23	345+70	370+100	410+150	6-25x21	6	24.8	22	22
XM50	25	50	108	54	28	370+70	400+100	450+150	6-28x23	8	28.3	25	25
XM60	30	60	130	65	34	470+90			6-32x26	8	33.3	30	30
XM70	35	70	140	70	33	470+90			8-38x32	10	38.3	/	/
XM80	40	80	160	80	40	470+90			8-48x42	12	43.3	/	/
XM95	50	95	190	95	50	530+90			8-48x42	14	53.8	/	/